



**Address:**  
**JAMBU PERSHAD & SONS**  
6275/22 Nicholson Road,  
Ambala Cantt, Haryana,  
INDIA  
Pin: 133001

**Email:**  
sales@japson.com  
japsonambala@yahoo.com

**Website:**  
www.japson.com  
**Phone:**  
+91-171-4006897

---

# High Precision Balance - 220g/520g/1020g-0.001g

## Product Image

---









## Description

---


MODEL	HPB201	HPB501	HPB1001
Capacity	220 g	520 g	1020 g
Pan Size	90 mm Ø		120 mm Ø
Readability	0.001 g ( 1mg )		
Repeatability ( ± )	0.001 g		
Calibration	Internal Calibration		
Linearity ( ± )	± 0.002 g		
Min.(Capacity)	0.1 g		
Display	LCD		
Response Time	4Sec		
Tare Range	Full		
Operating Temperature	15°C to 30°C		
Density	Yes		
Unit	mg, g, ct, ozt, oz, GN, dwt, lb		
Key Sound	Yes		
Weighing Chamber Height	195 mm		
Baudrate	1200, 2400, 4800, 9600		
Class	I		
Interface	RS232C		
Data Output Mode	Command and continuous Output		
Power Supply	AC 220V / 50-60 Hz		
Dimension (LxWxH) mm	220 x 360 x 345 mm		
Weight	10 kg		

SPECIFICATIONS

Density Determination Kit for solid & liquid sample (Optional) - Manual Calculation

-  Electro Magnetic Force Compensation
-  Density Determination
-  Underhook Weighing
-  RS232C Interface
-  Internal Calibration
-  Counting Weighing mode

-  LCD display
-  Percentage Weighing
-  Multiple Weighing Units
-  TARE

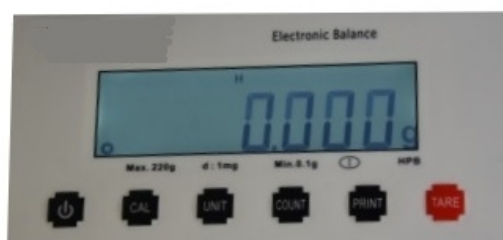

*Standard Accessories*

- Instrument
- Draft ring
- Pan
- Pan support
- Dust guard
- Adaptor
- User manual

-  
High Precision Balance - 220g/0.001g

**Catalog No.** 101133 (A)

High Precision Balance - 520g/0.001g

**Catalog No.** 101133 (B)

High Precision Balance - 1020g/0.001g

**Catalog No.** 101133 (C)

## Disclaimer

---

The Products details given on this page are indicative in nature and JAPSON reserves the right to change them without prior notice. Buyer is also requested to re-check the specifications and other features of product at the time of order as product development is a continuous process and minor modifications may be made to design based on latest availability, process and design.